

# GRIB decoding

## Computer User Training Course 2016

Paul Dando

User Support

[advisory@ecmwf.int](mailto:advisory@ecmwf.int)

# Contents

- GRIB description and overview
  - GRIB edition 1 and GRIB edition 2
  - Major differences between GRIB edition 1 and 2
  - Status of ECMWF migration to GRIB edition 2
- Using GRIB Tools
  - Introduction to GRIB API
  - Inspecting the content of GRIB messages
  - Decoding GRIB messages
  - Manipulation of GRIB messages
- Decoding GRIB messages with Fortran 90 ... and Python

# GRIB

- GRIB – “General Regularly-distributed Information in Binary form”
- Code defined by the WMO / CBS in 1985 for the exchange of large volumes of gridded data
- Machine independent
- Requires software for encoding and decoding

47 52 49 42	00 00 66 01	00 00 1C 01	62 01 FF 80	33 6D 00 01	06 0C	GRIB f b ^Ä3m
05 0C 00 0C	00 C8 05 00	00 00 15 00	00 00 00 00	32 02 2B 0A	00 F8	» 2 + ^
01 90 80 33	C2 00 16 76	88 00 68 1A	00 76 F2 00	64 00 64 40	00 00	éÄ3- v à h vÚ d d@
00 00 80 55	F0 80 9C 40	00 00 00 00	43 3E B0 71	00 00 00 00	00 00	ÄU•Äú@ C>∞q
0C 08 80 11	3C 1F 09 7C	00 00 37 37	37 37			Ä <   7777

- Currently there are two different coding standards

## GRIB edition 1

- Currently used for ECMWF operational surface and pressure level data


## GRIB edition 2

- Recent format now being used by some centres and for the TIGGE archive
- Used for ECMWF operational model level data since 18 May 2011

# GRIB Structure

- A **file** may contain one or more GRIB **messages**
- Each message contains several **sections**
- Data descriptors are self-defining
- A file can contain a mix of editions 1 and 2

47 52 49 42	00 00 66 01	00 00 1C 01	62 01 FF 80	33 6D 00 01	06 0C	GRIB f	b ~Ä3m
05 0C 00 0C	00 C8 05 00	00 00 15 00	00 00 00 00	32 02 2B 0A	00 F8	»	2 + -
01 90 80 33	C2 00 16 76	88 00 68 1A	00 76 F2 00	64 00 64 40	00 00	éÄ3~	và h vÚ d d@
00 00 80 55	F0 80 9C 40	00 00 00 00	43 3E B0 71	00 00 00 00	00 00	ÄU•Äú@	C>∞q
0C 08 80 11	3C 1F 09 7C	00 00 37 37	37 37			Ä <	7777

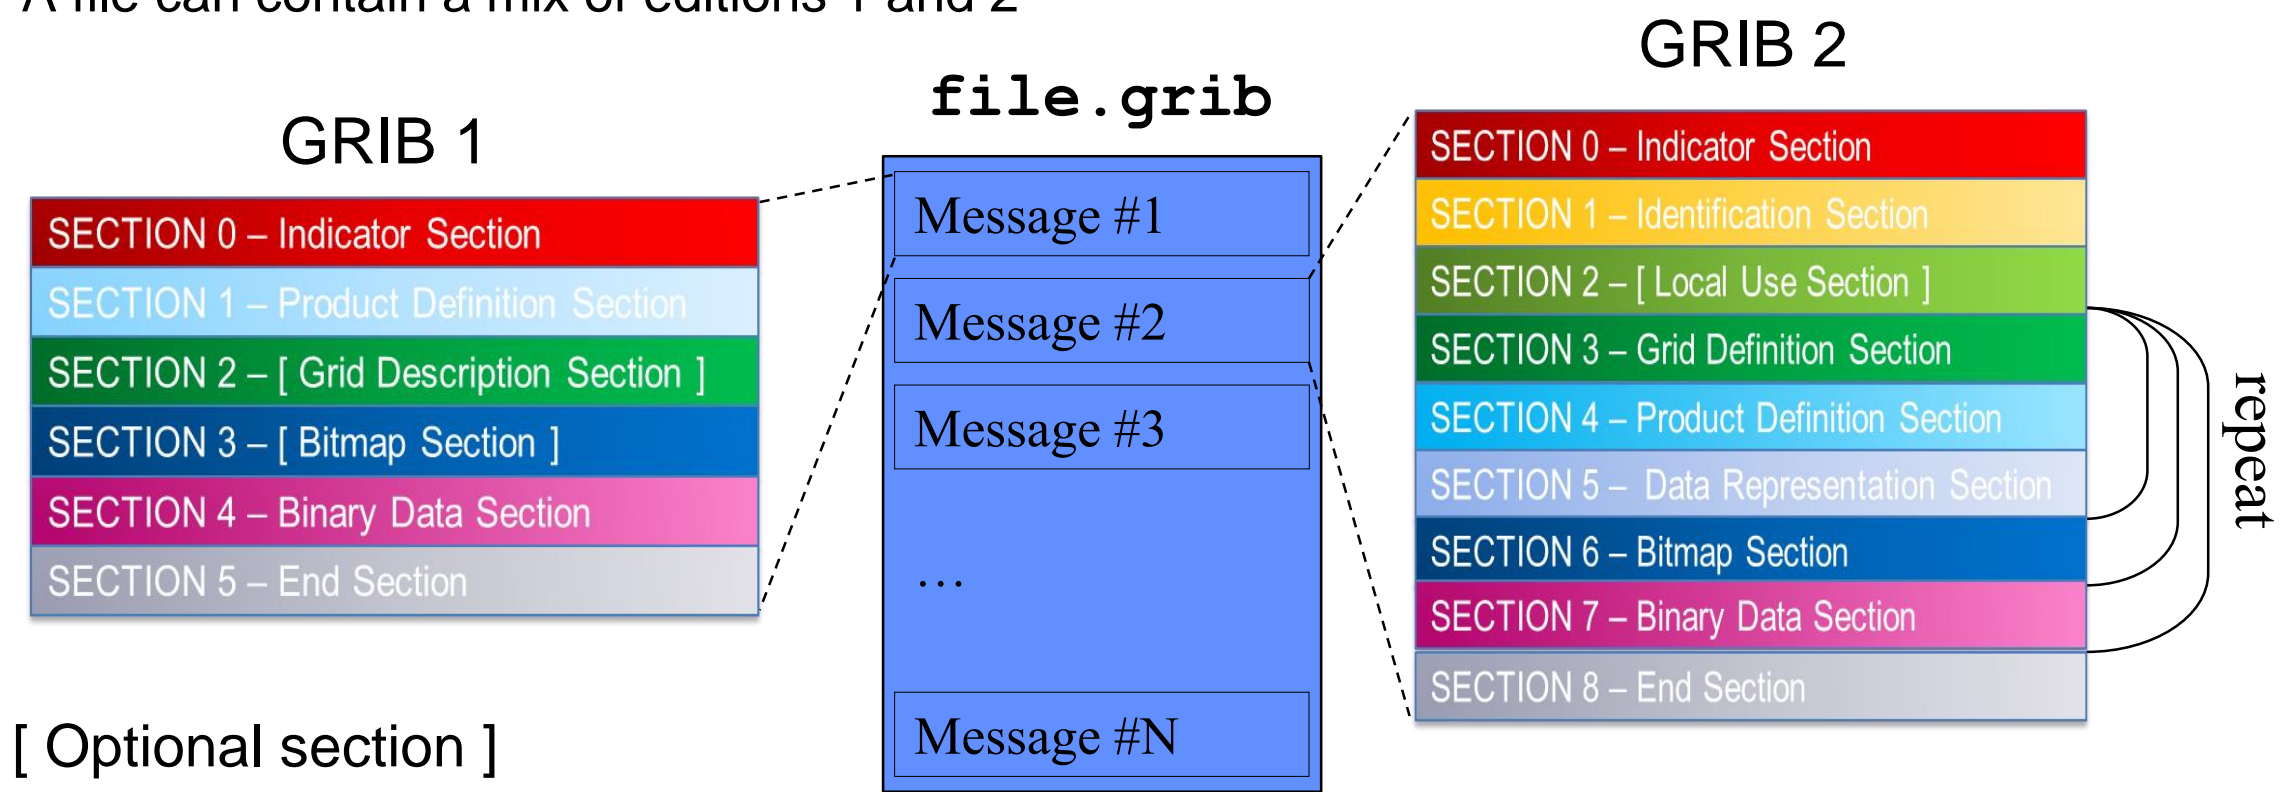

# GRIB 1 & GRIB 2 – Major differences

- The coding principles for GRIB edition 1 and 2 are similar but their implementation is **very different**
- The structure of GRIB 1 and GRIB 2 messages is different
  - Both have sections but with **different meanings**
- In GRIB 2 several variables are defined with more precision
  - In GRIB 1 latitudes and longitudes are in milli-degrees
  - In GRIB 2 latitudes and longitudes are in micro-degrees
- In GRIB 2 longitude values must lie between 0° and 360°
- Encoding of the parameter is **very** different
- In GRIB 2 the description of the data (parameter, time, statistics, grid...) is template / table based
  - More flexible ... but also more complex !

# Use of GRIB 2 at ECMWF

## What is currently affected ?

- Since **18 May 2011** all model level fields for HRES and ENS (including the monthly extension) are encoded in GRIB 2
  - GRIB 1 model level data are no longer produced or disseminated
- Most surface and all pressure level fields are encoded in GRIB 1
  - Some recently introduced surface fields are encoded in GRIB 2 (e.g. ptype)
- Staged migration of remaining GRIB 1 fields to GRIB 2 “will follow”

## And what's not ?

- The wave model
- The System-4 seasonal forecast model
- ERA-Interim

# Example GRIB edition 1 message

```
===== MESSAGE 1 ( length=4284072 ) =====
1-4  identifier = GRIB
5-7  totalLength = 4284072
8    editionNumber = 1
===== SECTION_1 ( length=52, padding=0 ) =====
1-3  section1Length = 52
4    table2Version = 128
5    centre = 98 [European Center for Medium-Range Weather Forecasts (grib1/0.table) ]
6    generatingProcessIdentifier = 141
7    gridDefinition = 255
8    section1Flags = 128 [10000000]
9    indicatorOfParameter = 129 [Geopotential (m**2 s**-2) (grib1/2.98.128.table) ]
10   indicatorOfTypeOfLevel = 1 [Surface (of the Earth, which includes sea surface) (grib1/3.table) ]
11-12 level = 0
13   yearOfCentury = 16
14   month = 2
15   day = 24
16   hour = 0
17   minute = 0
18   unitOfTimeRange = 1 [Hour (grib1/4.table) ]
...
```

# Example GRIB edition 2 message

```
#===== MESSAGE 1 ( length=4284160 ) =====
1-4      identifier = GRIB
5-6      reserved = MISSING
7        discipline = 0 [Meteorological products (grib2/tables/5/0.0.table) ]
8        editionNumber = 2
9-16     totalLength = 4284160
===== SECTION_1 ( length=21, padding=0 ) =====
1-4      section1Length = 21
5        numberOfSection = 1
6-7     centre = 98 [European Centre for Medium-Range Weather Forecasts (grib1/0.table) ]
8-9     subCentre = 0
10      tablesVersion = 5 [Version implemented on 4 November 2009 (grib2/tables/1.0.table) ]
11      localTablesVersion = 0 [Local tables not used (grib2/tables/5/1.1.table) ]
12      significanceOfReferenceTime = 1 [Start of forecast (grib2/tables/5/1.2.table) ]
13-14   year = 2016
15      month = 2
16      day = 22
17      hour = 12
18      minute = 0
19      second = 0
20      productionStatusOfProcessedData = 0 [Operational products (grib2/tables/5/1.3.table) ]
21      typeOfProcessedData = 1 [Forecast products (grib2/tables/5/1.4.table) ]
===== SECTION_2 ( length=17, padding=0 ) =====
1-4      section2Length = 17
...
```



# Introducing GRIB API

- The GRIB API Library has been developed by ECMWF for encoding and decoding of GRIB data
- The library includes:
  - an Application Programming Interface
  - a set of command line tools (the GRIB Tools) to provide a quick and easy way to manipulate data
  - Fortran 90, C and Python interfaces which give access to the main features of the library
- It provides the user with a higher level of access, hiding the binary layer of the message
- It provides an easy and reliable way of encoding and decoding both GRIB 1 and GRIB 2 messages
- It decodes / encodes both GRIB editions with the **SAME** function calls
- The GRIB API Library is being incorporated into the ecCodes software package

# GRIB API approach

- GRIB API uses a key / value approach to access the information in a GRIB message

`numberOfPointsAlongAParallel` → Number of points along a parallel

`numberOfPointsAlongAMeridan` → Number of points along a meridian

...

- The set of keys available changes from one message to another depending on:
  - the GRIB edition
  - the content of the message
- Changing the values of some keys can cause some other keys to disappear and new keys to become available

# GRIB API – coded and computed keys

- The value of a key is not always coded in the GRIB message
- Some keys are combinations of several other keys and provided through a given algorithm or can be just temporary (transient)
- Coded keys
  - Linked directly to the octets of the GRIB message
  - Values obtained by decoding the octet e.g. [indicatorOfParameter](#)
- Computed keys
  - Obtained by combining other keys (coded or computed)
  - Provide a synthesis of information contained in the message giving access to complex attributes
  - Setting the value of a computed key sets all related keys in a cascade
    - e.g. setting [typeOfGrid=regular\\_ll](#) will set all the various keys in the Grid Definition Section for a regular lat-long grid
  - MARS keywords are available as computed keys

# GRIB API keys – parameter

- The definition of the parameter is very different in the two editions

GRIB 1 keys	GRIB 2 keys
centre	discipline
table2Version	parameterCategory
indicatorOfParameter	parameterNumber
levelType	typeOfFirstFixedSurface
level	scaleFactorOfFirstFixedSurface
...	scaledValueOfFirstFixedSurface
	typeOfSecondFixedSurface
	scaleFactorOfSecondFixedSurface
	scaledValueOfSecondFixedSurface
	productDefinitionTemplateNumber
	...

# GRIB API keys – parameter

- GRIB API provides some **edition-independent** keys to identify a parameter

Key name	Example value
paramId	151
shortName	msl
centre	ecmf (or 98)
name	Mean sea level pressure
unit	Pa

- This set of keys is the parameter *namespace*
- There are several different namespaces
  - ‘parameter’, ‘time’, ‘geography’, ‘vertical’, ‘statistics’, ‘mars’

# GRIB API keys – time

- Start of forecast run

Key name	Example values
dataDate	20160224 (YYYYMMDD)
dataTime	0, 600, 1200, 1800

- Forecast Step

Key name	Example values
stepType	instant, accum, avg, max, min, ...
stepUnits	s, m, h, 3h, 6h, 12h, D, M, Y, 10Y, 30Y, C
startStep	0, 3, ...
endStep (= step)	0, 3, ..
stepRange	3-6, 6 (“startStep-endStep” , “endStep” )

- Validity of the forecast

Key name	Example values
validityDate	20160224 (YYYYMMDD)
validityTime	0, 300, 1200, 1800

# GRIB API keys – vertical and geography

- Vertical namespace

Key name	Example values
typeOfLevel	hybrid, surface, depthBelowLandLayer, isobaricInhPa, ...
level	0, 1, 137, 1000, 850, ...

- Geography namespace

Key name	Example values
gridType	reduced_gg, regular_ll, sh, ...
latitudeOfFirstGridPointInDegrees	90.0, 55.5, ...
longitudeOfFirstGridPointInDegrees	0.0, 350.0, ...
latitudeOfLastGridPointInDegrees	-90.0, 35.0, ...
longitudeOfLastGridPointInDegrees	360.0, 50.0, ...
iDirectionIncrementInDegrees	0.5, ...
jDirectionIncrementInDegrees	0.5, ...
N	640, 320, ...
...	...

# GRIB API keys – MARS

- There is a namespace consisting of all the MARS keywords

Key name	Example values
date	20160224 (YYYYMMDD)
time	0000, 0600, 1200, 1800
step	3, 6, 9, 12, ...
class	od, ...
stream	oper, enfo, ...
expver	0001
type	an, fc, cf, pf, ...
levtype	sfc, pl, ml
levelist	500, 850, ...
param	151.128



# GRIB API keys and parameters – THE Reference

- Parameters in GRIB API

- [GRIB Parameters Database](http://apps.ecmwf.int/codes/grib/param-db) - <http://apps.ecmwf.int/codes/grib/param-db>

- GRIB API keys

- [GRIB Edition 1](http://apps.ecmwf.int/codes/grib/format/grib1/) - <http://apps.ecmwf.int/codes/grib/format/grib1/>
- [GRIB Edition 2](http://apps.ecmwf.int/codes/grib/format/grib2/) - <http://apps.ecmwf.int/codes/grib/format/grib2/>
- [GRIB Edition Independent](http://apps.ecmwf.int/codes/grib/format/edition-independent/) - <http://apps.ecmwf.int/codes/grib/format/edition-independent/>

- Disclaimer

*The official copy of the FM-92 GRIB document from which the relevant information contained in the following pages is copied can be obtained from the WMO web site:*  
<http://www.wmo.int/pages/prog/www/WMOCodes.html>

# GRIB API keys

- The easiest way to inspect a GRIB file and to find the keys available is to use the [GRIB Tools](#)
  - [grib\\_ls](#) to get a summary of the content
  - [grib\\_dump](#) to get a more detailed view

# GRIB Tools – basic concepts

- The GRIB tools are part of the ECMWF GRIB API Library
- They are a set of command line programs for interactive and batch decoding and processing of GRIB data
- They provide ready and tested solutions to the most common processing of GRIB data
  - They work with both GRIB edition 1 and GRIB edition 2
- Their use will avoid the need to write new code and thus speed up your work
  - Consider using GRIB Tools instead of writing your own programs
- The tools are provided with many common options so that it is quick to apply the same options to different tools
- **Use of the tools is recommended whenever possible !**

# GRIB Tools – more basics

- All of the tools use a common syntax

```
grib_<tool> [options] grib_file grib_file ... [output_grib]
```

- There are tools for getting information about the GRIB API installation and the keys available
  - `grib_info`, `grib_keys`
- There are tools to inspect the content of and compare GRIB messages
  - `grib_ls`, `grib_dump`, `grib_get`, `grib_get_data`, `grib_compare`
- There are tools for counting and copying some messages
  - `grib_count`, `grib_copy`
- There are tools for making changes to the content of a GRIB message and converting from GRIB to NetCDF
  - `grib_set`, `grib_filter`, `grib_to_netcdf`

# GRIB Tools – getting help

- UNIX ‘man’-style pages are available for each tool by running the tool without any options or input file

```
> grib_dump
NAME      grib_dump

DESCRIPTION
          Dump the content of a grib file in different formats.

USAGE
          grib_dump [options] grib_file grib_file ...

OPTIONS
          -O      Octet mode. WMO documentation style dump.
          -D      Debug mode.
          -d      Print all data values.

...

```

## `grib_ls` – list the content of GRIB files

- Use `grib_ls` to get a summary of the content of GRIB files
- Without options `grib_ls` prints a default list of keys
- Options exist to specify the set of keys to print or to print other keys in addition to the default set
- Output can be ordered
  - e.g. order by ascending or descending step
- `grib_ls` does not fail if a key is not found
- `grib_ls` can also be used to find the grid point(s) nearest to a specified latitude-longitude and print the value of the field at that point
  - Modes available to obtain one or four nearest grid points

# grib\_ls – usage

```
grib_ls [options] grib_file grib_file ...
```

## Basic options

<code>-p key1,key2,...</code>	Keys to print
<code>-P key1,key2,...</code>	Additional keys to print
<code>-w key1=val1,key2!=val2...</code>	Where option
<code>-B "key asc, key desc"</code>	Order by: "step asc, centre desc"
<code>-n namespace</code>	Print keys for <code>namespace</code>
<code>-m</code>	Print MARS keys
<code>-i index</code>	Print data value at given index
<code>-l lat,lon[,MODE,FILE]</code>	Value(s) nearest to lat-lon point
<code>-F format</code>	Format for floating point values
<code>-W width</code>	Minimum column width (default 10)

# grib\_ls – examples

```
> grib_ls file.grib1
```

```
file.grib1
```

edition	centre	typeOfLevel	level	dataDate	...	dataType	shortName	packingType	gridType
1	ecmf	isobaricInhPa	1000	20160224	...	an	t	spectral_complex	sh
1	ecmf	isobaricInhPa	500	20160224	...	an	t	spectral_complex	sh
1	ecmf	isobaricInhPa	200	20160224	...	an	t	spectral_complex	sh
1	ecmf	isobaricInhPa	100	20160224	...	an	t	spectral_complex	sh

```
4 of 4 grib messages in file.grib1
```

```
4 of 4 total grib messages in 1 files
```

- Use **-p** option to specify a list of keys to be printed

```
> grib_ls -p centre,dataDate,shortName,paramId,typeOfLevel,level file.grib1
```

```
file.grib1
```

centre	dataDate	shortName	paramId	typeOfLevel	level
ecmf	20140304	t	130	isobaricInhPa	1000
ecmf	20160224	t	130	isobaricInhPa	500
ecmf	20160224	t	130	isobaricInhPa	200
ecmf	20160224	t	130	isobaricInhPa	100

```
4 of 4 grib messages in file.grib1
```

```
4 of 4 total grib messages in 1 files
```



## grib\_ls – examples

- When a key is not present in the GRIB file, it returns “not found” for this key

```
> grib_ls -p my_key file.grib1
```

```
file.grib1
```

```
my_key
```

```
not_found
```

```
> echo $?
```

```
0
```

*exit code returned = 0*

- Similar behaviour to `grib_get` (see later)
  - `grib_ls` is more for interactive use
  - use `grib_get` within scripts

## Using the 'where' option

- The where option `-w` can be used with all the GRIB Tools
- Constraints are of the form `key=value` or `key!=value` or `key=value1/value2/value2`  
`-w key1=value1 ,key2:i!=value2 ,key3:s=value3`
- Messages are processed only if they match **ALL** the key / value constraints

```
> grib_ls -w level=100 file.grib1 "IS"  
...  
> grib_ls -w level!=100 file.grib1 "NOT"  
...  
> grib_ls -w level=100,stepRange=3 file.grib1 "AND"  
...  
> grib_ls -w level=100/200/300/500 file.grib1 "OR"  
...
```

# Specifying the type of the key

- All grib\_api keys have a default type
  - e.g. string, integer, floating point
- The type of the key can be specified as follows:
  - **key** → native type
  - **key:i** → integer (or **key:l** - the “el” is for “long” !)
  - **key:s** → string
  - **key:d** → double

```
> grib_ls -p centre:i,dataDate,shortName,paramId,typeOfLevel,level file.grib1
```

```
file.grib1
```

centre	dataDate	shortName	paramId	typeOfLevel	level
98	20160224	t	130	isobaricInhPa	1000
98	20160224	t	130	isobaricInhPa	500
98	20160224	t	130	isobaricInhPa	200
98	20160224	t	130	isobaricInhPa	100

```
4 of 4 grib messages in file.grib1
```

```
4 of 4 total grib messages in 1 files
```

## `grib_dump` – dump content of GRIB files

- Use `grib_dump` to get a detailed view of the content of a file containing one or more GRIB messages
- Various output formats are supported
  - `Octet mode` provides a WMO documentation style dump
  - `Debug mode` prints all keys available in the GRIB file
  - `Octet` and `Debug modes` cannot be used together
  - Octet content can also be printed in hexadecimal format
- Options also exist to print key `aliases` and key `type` information

# grib\_dump – usage

```
grib_dump [options] grib_file grib_file ...
```

## Basic options

- `-O` Octet mode (WMO Documentation style)
- `-D` Debug mode
- `-a` Print key alias information
- `-t` Print key type information
- `-H` Print octet content in hexadecimal
- `-w key{=/!}=value,...` Where option
- `-d` Print all data values
- ...

# grib\_dump – examples

```
> grib_dump file.grib1
```

```
***** FILE: file.grib1
#===== MESSAGE 1 ( length=4284072 ) =====
GRIB {
  editionNumber = 1;
  table2Version = 128;
  # European Center for Medium-Range Weather Forecasts (grib1/0.table)
  centre = 98;
  generatingProcessIdentifier = 141;
  # Geopotential (m**2 s**-2) (grib1/2.98.128.table)
  indicatorOfParameter = 129;
  # Surface (of the Earth, which includes sea surface) (grib1/3.table)
  indicatorOfTypeOfLevel = 1;
  level = 0;
  # Forecast product valid at reference time + P1 (P1>0) (grib1/5.table)
  timeRangeIndicator = 0;
  # Unknown code table entry (grib1/0.ecmf.table)
  subCentre = 0;
  paramId = 129;
  #-READ ONLY- units = m**2 s**-2;
  #-READ ONLY- nameECMF = Geopotential;
  #-READ ONLY- name = Geopotential;
  decimalScaleFactor = 0;
  dataDate = 20160224;
  dataTime = 0; ...
```

*Some keys are read only*

*keys are case sensitive:  
dataDate, dataTime*

# grib\_dump examples: WMO octet mode

```
> grib_dump -O file.grib1
```

```
***** FILE: file.grib1
===== MESSAGE 1 ( length=4284072 ) =====
1-4  identifier = GRIB
5-7  totalLength = 4284072
8    editionNumber = 1
===== SECTION_1 ( length=52, padding=0 ) =====
1-3  section1Length = 52
4    table2Version = 128
5    centre = 98 [European Center for Medium-Range Weather Forecasts (grib1/0.table) ]
6    generatingProcessIdentifier = 141
7    gridDefinition = 255
8    section1Flags = 128 [10000000]
9    indicatorOfParameter = 129 [Geopotential (m**2 s**-2) (grib1/2.98.128.table) ]
10   indicatorOfTypeOfLevel = 1 [Surface (of the Earth, which includes sea surface) (grib1/3.table) ]
11-12 level = 0
13   yearOfCentury = 16
14   month = 2
15   day = 24
16   hour = 0
17   minute = 0
18   unitOfTimeRange = 1 [Hour (grib1/4.table) ]
...

```

# grib\_dump examples: Octet mode with types, aliases and Hex

```
> grib_dump -OtaH file.grib1
```

```
***** FILE: file.grib1
===== MESSAGE 1 ( length=4284072 ) =====
1-4  ascii identifier = GRIB ( 0x47 0x52 0x49 0x42 )
5-7  g1_message_length totalLength = 4284072 ( 0x41 0x5E 0xA8 )
8    unsigned editionNumber = 1 ( 0x01 ) [ls.edition]
===== SECTION_1 ( length=52, padding=0 ) =====
1-3  section_length sectionLength = 52 ( 0x00 0x00 0x34 )
4    unsigned table2Version = 128 ( 0x80 ) [gribTablesVersionNo]
5    codetable centre = 98 ( 0x62 ) [European Center for Medium-Range Weather Forecasts(grib1/0.table) ]
      [identificationOfOriginatingGeneratingCentre,originatingCentre, ls.centre,
centreForTable2]
6    unsigned generatingProcessIdentifier = 141 ( 0x88 ) [generatingProcessIdentificationNumber, process]
7    unsigned gridDefinition = 255 ( 0xFF )
8    codeflag section1Flags = 128 [10000000] ( 0x80 )
9    codetable indicatorOfParameter = 129 ( 0x81 ) [Geopotential (m**2 s**-2)(grib1/2.98.128.table) ]
10   codetable indicatorOfTypeOfLevel = 1 ( 0x01 ) [Surface (of the Earth,which includes sea surface)
(grib1/3.table) ] [levelType, mars.levtype]
11-12 unsigned level = 0 ( 0x00 0x00 ) [vertical.topLevel vertical.bottomLevel, ls.level, lev]
13   unsigned yearOfCentury = 16 ( 0x10 )
14   unsigned month = 2 ( 0x02 )
15   unsigned day = 24 ( 0x18 )
16   unsigned hour = 0 ( 0x00 )
...
```



# Practicals

- Work in your \$SCRATCH

```
cd $SCRATCH
```

- Make a copy of the practicals directory in your \$SCRATCH

```
tar -xvf /scratch/ectrain/trx/grib_practicals.tar
```

- This will create a directory in your \$SCRATCH containing the GRIB data files for all today's practicals

- There are sub-directories for each practical:

```
ls $SCRATCH/grib_practicals
```

```
practical1 practical2 practical3
```

```
practical4 practical5 practical6
```

# Practical 1: using `grib_ls` and `grib_dump`

1. Use `grib_ls` to inspect the content of the files `msl.grib1` and `msl.grib2`
  - Which keys does `grib_ls` show by default ?
  - What fields do the GRIB messages contain ?
  - Print the MARS keys. Add the `shortName` to the output
  - Order the output in descending step order [Hint: think about strings and integers...]
2. Use `grib_ls` to print the `centre`, `dataDate`, `stepRange`, `typeOfLevel` and `shortName` for forecast step 6 only
  - Output the `centre` as both a string and an integer
3. Use `grib_dump` to inspect the fourth (`count=4`) GRIB message in both files
  - Experiment with the different `grib_dump` options: `-O`, `-a` and `-t`
  - Identify the parameter, date, time, forecast step and the grid geometry

# GRIB Examiner (Metview 4)



- Interactive examiner using GRIB API
- Actively developed and maintained by the Metview team
- Can be started up from the command line. E.g. on ecgate use

```
metview -e grib your_grib_file
```

# GRIB Examiner: The user interface

File: /home/graphics/cgr/metview/Local/uPlot/tz\_60.grb  
Permissions: -rw-r----- Owner: cgr Group: graphics Size: 3.4MB Modified: 2009-11-05 09:04  
Total number of messages: 60

Index	Name	Date	Time	Step	Level	LevTyp
01	t	20090504	1200	0	1000	pl
02	z	20090504	1200	0	1000	pl
03	t	20090504	1200	0	850	pl
04	z	20090504	1200	0	850	pl
05	t	20090504	1200	0	700	pl
06	z	20090504	1200	0	700	pl
07	t	20090504	1200	0	500	pl
08	z	20090504	1200	0	500	pl
09	t	20090504	1200	0	400	pl
10	z	20090504	1200	0	400	pl
11	t	20090504	1200	0	300	pl
12	z	20090504	1200	0	300	pl
13	t	20090504	1200	12	1000	pl
14	z	20090504	1200	12	1000	pl
15	t	20090504	1200	12	850	pl
16	z	20090504	1200	12	850	pl
17	t	20090504	1200	12	700	pl
18	z	20090504	1200	12	700	pl
19	t	20090504	1200	12	500	pl
20	z	20090504	1200	12	500	pl
21	t	20090504	1200	12	400	pl
22	z	20090504	1200	12	400	pl
23	t	20090504	1200	12	300	pl
24	z	20090504	1200	12	300	pl
25	t	20090504	1200	24	1000	pl
26	z	20090504	1200	24	1000	pl
27	t	20090504	1200	24	850	pl
28	z	20090504	1200	24	850	pl
29	t	20090504	1200	24	700	pl
30	z	20090504	1200	24	700	pl

Meta data of the selected message  
Dump mode: WMO-style dump

Position	Key name (GRIB API)	Value
Section 1		
Section 2		
1-3	section2Length	32
4	numberOfVerticalCoordinateVa...	0
5	pvlLocation	255
6	dataRepresentationType	0 [Latitude/Longitude Grid (grib1/6.table)]
7-8	Ni	240
9-10	Nj	121
11-13	latitudeOfFirstGridPoint	90000
14-16	longitudeOfFirstGridPoint	0
17	resolutionAndComponentFlags	128 [10000000]
18-20	latitudeOfLastGridPoint	-90000
21-23	longitudeOfLastGridPoint	358500
24-25	iDirectionIncrement	1500
26-27	jDirectionIncrement	1500
28	scanningMode	0 [00000000]
29-32	padding_grid0_1	= 4 {
Section 4		
1-3	section4Length	58092
4	dataFlag	8 [00001000]
5-6	binaryScaleFactor	-9
7-10	referenceValue	236.152
11	bitsPerValue	16
12-5...	values	= (29040,58081) {
Section 5		

Log  
Clear log

Task: Generating grib key list for message: 1  
Method: GRIB API C interface  
Status: OK

Task: Generating grib key list for all the messages  
Method: GRIB API C interface  
Status: OK

Status: OK

Message list  
(with user  
defined GRIB  
API key  
selection)


File  
information

Meta data  
(grib\_dump)


Log

# GRIB Examiner: managing GRIB API keys

Insert/edit keys from header menu

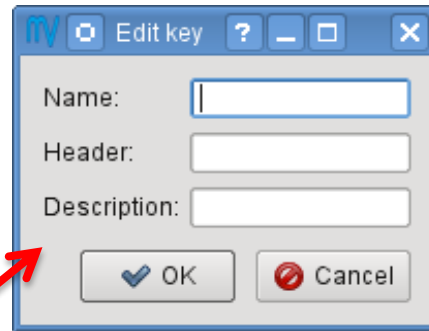

An 'Edit key' dialog box with three input fields: 'Name:', 'Header:', and 'Description:'. Below the fields are 'OK' and 'Cancel' buttons. A red arrow points from the 'Name' field to the 'Name' column of the table below.

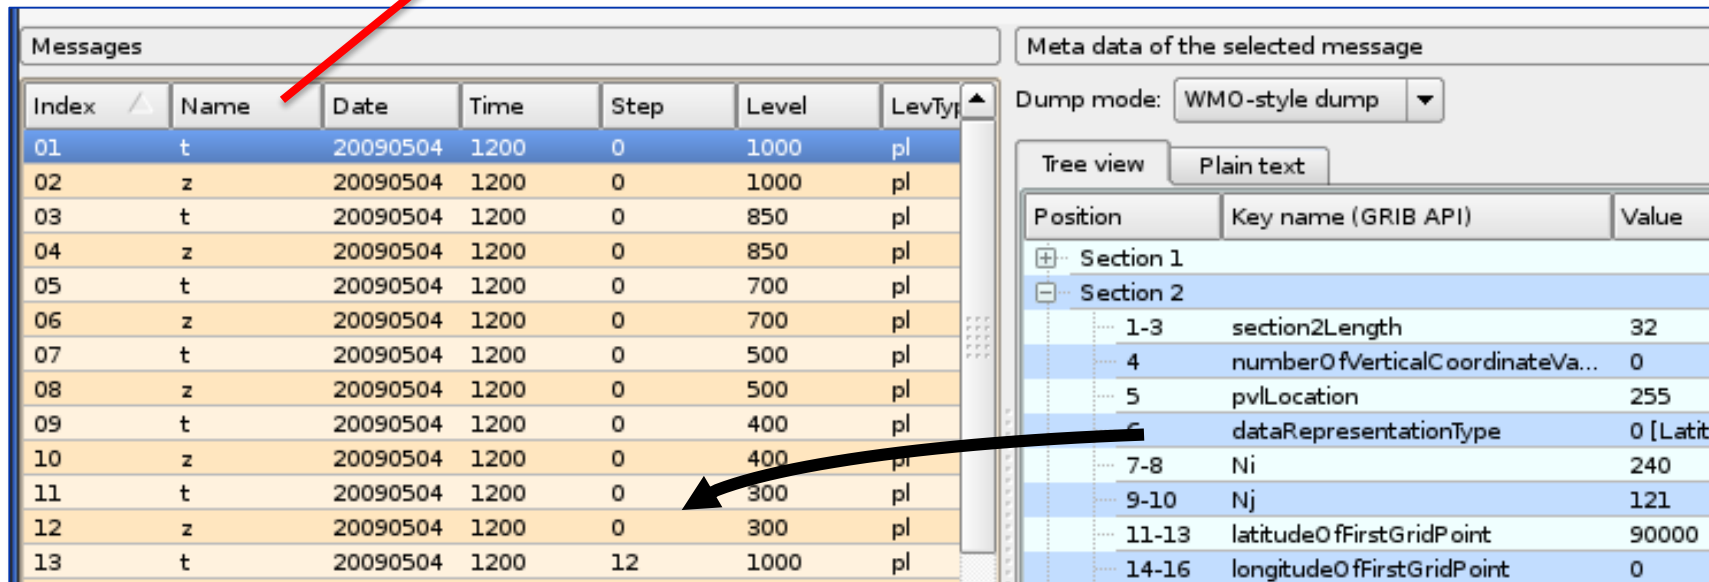

The main interface of GRIB Examiner. On the left is a 'Messages' table. On the right is a 'Meta data of the selected message' panel with a 'Tree view' and 'Plain text' tabs. A black arrow points from the 'Level' column of the table to the 'Tree view'.

Index	Name	Date	Time	Step	Level	LevTyp
01	t	20090504	1200	0	1000	pl
02	z	20090504	1200	0	1000	pl
03	t	20090504	1200	0	850	pl
04	z	20090504	1200	0	850	pl
05	t	20090504	1200	0	700	pl
06	z	20090504	1200	0	700	pl
07	t	20090504	1200	0	500	pl
08	z	20090504	1200	0	500	pl
09	t	20090504	1200	0	400	pl
10	z	20090504	1200	0	400	pl
11	t	20090504	1200	0	300	pl
12	z	20090504	1200	0	300	pl
13	t	20090504	1200	12	1000	pl

Meta data of the selected message

Dump mode: WMO-style dump

Tree view Plain text

Position	Key name (GRIB API)	Value
Section 1		
Section 2		
1-3	section2Length	32
4	numberOfVerticalCoordinateVa...	0
5	pvlLocation	255
6	dataRepresentationType	0 [Latitu
7-8	Ni	240
9-10	Nj	121
11-13	latitudeOfFirstGridPoint	90000
14-16	longitudeOfFirstGridPoint	0

Drag and drop a new key

# The parameter database

- The parameter database stores information about the GRIB 1, GRIB 2 and, for some parameters, NetCDF encoding of all parameters recognised by GRIB API

Parameter database:

Show 20 entries

Search:

Name	Short Name	Unit	Parameter ID	Grib1	Grib2	NetCDF
Geopotential	z	$m^2 s^{-2}$	129	✓	✓	✓
Temperature	t	K	130	✓	✓	✓
U component of wind	u	$m s^{-1}$	131	✓	✓	✓
V component of wind	v	$m s^{-1}$	132	✓	✓	✓
Specific humidity	q	$kg kg^{-1}$	133	✓	✓	✓
Surface pressure	sp	Pa	134	✓	✓	✓
Vertical velocity	w	$Pa s^{-1}$	135	✓	✓	✓
Total column water vapour	tcwv	$kg m^{-2}$	137	✓	✓	✓
Vorticity (relative)	vo	$s^{-1}$	138	✓	✓	✓
Soil temperature level 1	stl1	K	139	✓	✓	✓
Soil wetness level 1	swl1	m of water equivalent	140	✓	✓	✓

- The database is accessible via a web interface at:
  - <http://apps.ecmwf.int/codes/grib/param-db>

## Finding nearest grid points with grib\_ls

- The value of a GRIB field close to a specified Latitude/Longitude point can be found with `grib_ls`

```
grib_ls -l Latitude,Longitude[,MODE,file] grib_file
```

**MODE** Can take the values

- 4 Print values at the 4 nearest grid points (default)
- 1 Print value at the closest grid point

**file** Specifies a GRIB file to use as a mask  
The closest *land* point (with mask  $\geq 0.5$ ) is printed

- GRIB files specified **must** contain grid point data

## Practical 2: using grib\_ls –I

1. The file msl.grib1 contains the mean sea-level pressure from the EPS control forecast at 6-hourly time steps for the first 24 hours on a N320 reduced Gaussian grid
2. Find the value of the MSLP at the grid point nearest to ECMWF (Lat 51.42°N, Lon 0.95°W) at each forecast step
3. Be careful to specify the longitude correctly !
  - What is the lat-lon value of the grid point nearest to ECMWF ?
  - How far is the chosen grid point from ECMWF ?
4. Change the command used to output only the forecast step and the MSLP value at the nearest grid point
5. Change the command to output the MSLP values at the four grid points nearest to ECMWF
6. Use the file lsm.grib1 to provide a land-sea mask
  - Are all four nearest grid points land points (mask  $\geq 0.5$ ) ?



## `grib_get` – get key / value pairs

- Use `grib_get` to get the values of one or more keys from one or more GRIB files – very similar to `grib_ls`
- By default `grib_get` **fails** if an error occurs (e.g. key not found) returning a non-zero exit code
  - Suitable for use in scripts to obtain key values from GRIB messages
  - Can force `grib_get` not to fail on error
- Options available to get all MARS keys or all keys for a particular namespace
  - Can get other keys in addition to the default set
- Format of floating point values can be controlled with a C-style format statement
- `grib_get` can also be used to find the grid point(s) nearest to a specified latitude-longitude and print the value of the field at that point
  - Works in the same way as `grib_ls`

## `grib_get` – examples

- To get the centre of the first (`count=1`) GRIB message in a file (both as a ‘string’ and a ‘long’)

```
> grib_get -w count=1 -p centre f1.grib1
ecmf

> grib_get -w count=1 -p centre:i f1.grib1
98
```

- `grib_get` fails if there is an error

```
> grib_get -p mykey f1.grib1
GRIB_API ERROR      : Key/value not found
```

```
> echo $?
246
```

*← returns the exit code from the previous command*

## `grib_get` – examples

- To get all the MARS keys, optionally printing the `shortName`

```
> grib_get -m f1.grib1
g sfc 20160224 1200 0 167.128 od an oper 0001

> grib_get -m -P shortName f1.grib1
2t g sfc 20160224 1200 0 167.128 od an oper 0001
```

- To get all keys belonging to the statistics namespace

```
> grib_get -n statistics f1.grib1
314.24 214.613 277.111 21.0494 41379.8 2.48314e-05 0
```

- `grib_get -m` is the same as `grib_get -n mars`

## grib\_get – controlling output format

- The format of floating point values can be controlled by using a C-style format statement with the **-F** option
  - F **"%.4f"** - Decimal format with 4 decimal places (1.2345)
  - F **"%.4e"** - Exponent format with 4 decimal places (1.2345E-03)

```
> grib_get -F "%.6f" -p maximum f1.grib1
```

```
314.240280
```

```
> grib_get -F "%.4e" -p maximum f1.grib1
```

```
3.1424e+02
```

- Default format is **-F "%.10e"**

## `grib_get` – `stepRange` and `stepUnits`

- The step is always printed as an **integer** value
- By default the units of the step are printed in hours
- To obtain the step in other units set the `stepUnits` appropriately with the `-s` option

```
> grib_get -p stepRange f1.grib1
```

```
6
```

```
12
```

```
> grib_get -s stepUnits=m -p stepRange f1.grib1
```

```
360
```

```
720
```

*stepUnits can be s, m, h, 3h, 6h, 12h, D, M, Y, 10Y, 30Y, C*

## Finding nearest grid points with grib\_get

- The value of a GRIB field close to a specified Latitude/Longitude point can be found with `grib_get`
  - Works in the same way as `grib_ls`

```
> grib_get -l 52.0,-1.43 f1.grib1  
  
273.58 272.375 273.17 273.531  
  
> grib_get -F "%.5f" -P stepRange -l 52.0,-1.43,1 f1.grib1  
  
0 272.37505
```

- GRIB files specified must contain grid point data

## Getting data values at an index point

- The value of a GRIB field at a particular index point can be printed using `grib_get` with the `-i` option
- For example, find the index of a nearest grid point with `grib_ls` and then use this with `grib_get` to build a list of values at that point:

```
> grib_get -F "%.2f" -i 2159 -p step,dummy:s f1.grib1
```

```
6 99429.31  
12 99360.25  
18 99232.31  
24 99325.56
```

*Forces a space  
between step and  
value*

- Also returns a value for non-grid point data !

## `grib_get_data` – print data values

- Use `grib_get_data` to print a list of latitude, longitude (for grid point data) and data values from one or more GRIB files
  - The format of the output can be controlled by using a C-style format statement with the `-F` option
    - `-F "% .4f"` – Decimal format with 4 decimal places (1.2345)
    - `-F "% .4e"` – Exponent format with 4 decimal places (1.2345E-03)
- The default format is `-F "% .10e"`
- By default missing values are not printed
    - A user-provided string can be printed in place of any missing values
  - By default `grib_get_data` fails if there is an error
    - Use the `-f` option to force `grib_get_data` not to fail on error



# grib\_get\_data – usage

```
grib_get_data [options] grib_file grib_file ...
```

## Options

<code>-p key1,key2,...</code>	Keys to print
<code>-w key1=val1,key2!=val2,...</code>	Where option
<code>-m missingValue</code>	Specify missing value string
<code>-F format</code>	C-style format for output values
<code>-f</code>	Do <i>not</i> fail on error
<code>-V</code>	Print GRIB API Version
<code>...</code>	

## grib\_get\_data – example

```
> grib_get_data -F "%.4f" f1.grib1
```

```
Latitude, Longitude, Value
```

```
81.000      0.000 22.5957
```

```
81.000      1.500 22.9009
```

```
81.000      3.000 22.8359
```

```
81.000      4.500 22.3379
```

```
81.000      6.000 21.5547
```

```
81.000      7.500 20.7344
```

```
81.000      9.000 19.8916
```

```
81.000     10.500 18.5747
```

```
81.000     12.000 17.2578
```

```
81.000     13.500 16.1343
```

```
81.000     15.000 14.9785
```

```
81.000     16.500 13.8296
```

```
...
```

*Format option  
applies to values  
only - not to the  
Latitudes and  
Longitudes*

## grib\_get\_data – missing values example

```
> grib_get_data -m XXXXX -F "%.4f" f1.grib1
```

```
Latitude, Longitude, Value
```

```
...
```

```
81.000 90.000 9.4189
```

```
81.000 91.500 8.6782
```

```
81.000 93.000 XXXXX
```

```
81.000 94.500 XXXXX
```

```
81.000 96.000 XXXXX
```

```
81.000 97.500 XXXXX
```

```
81.000 99.000 6.7627
```

```
81.000 100.500 7.4097
```

```
81.000 102.000 7.9307
```

```
...
```

*Missing values are  
printed with  
XXXXXX*

## Practical 3: using `grib_get` & `grib_get_data`

1. Use `grib_get` to obtain a list of all the pressure levels available for parameter T in the file `tz_an_pl.grib1`
2. Use `grib_get` to print the `stepRange` for the field in the file `surface.grib1` in (a) hours (b) minutes and (c) seconds
3. Repeat 2. for `surface2.grib1`
4. Use `grib_get_data` to print the latitude, longitude and values for the field in `surface.grib1`
  - Output results in decimal format with 5 decimal places
  - Output results in exponential format with 10 decimal places
  - Are there any missing values ?
5. Use `grib_get_data` to print the data values for the temperature at 500 hPa **only** from the file `tz_an_pl.grib1` ?
  - Make sure you print only the data for T500 ! What is printed ?

## `grib_copy` – copy contents of GRIB files

- Use `grib_copy` to copy selected contents of GRIB files optionally printing some key values
- Without options `grib_copy` prints **no** key information
- Options exist to specify the set of keys to print
  - Use verbose option (`-v`) to print keys
- Output can be ordered
  - E.g. order by ascending or descending step
- Key values can be used to specify the output file names
- `grib_copy` **fails** if a key is not found
  - Use the `-f` option to force `grib_copy` not to fail on error

## grib\_copy – examples

- To copy only fields at 100 hPa from a file

```
> grib_copy -w level=100 in.grib1 out.grib1
```

- To copy only those fields that are not at 100 hPa

```
> grib_copy -w level!=100 in.grib1 out.grib1
```


- Information can be output using the `-v` and `-p` options

```
> grib_copy -v -p shortName in.grib1 out.grib1
in.grib1
shortName
t
1 of 1 grib messages in in.grib1
1 of 1 total grib messages in 1 files
```

## grib\_copy – using key values in output file

- Key values can be used to specify the output file name

```
> grib_copy in.grib "out_[shortName].grib"  
  
> ls out_*  
  
out_2t.grib  out_msl.grib  ...
```

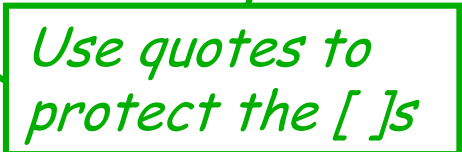

- This provides a convenient way to filter GRIB messages into separate files

## `grib_set` – set key / value pairs

- Use `grib_set` to
  - Set key / value pairs in the input GRIB file
  - Make simple changes to key / value pairs in the input GRIB file
- Each GRIB message is written to the output file
  - By default this includes messages for which no keys are changed
  - With `-s` (strict) option **only** messages matching **all constraints** in the where clause are copied
- An option exists to repack data
  - Sometimes after setting some keys involving properties of the packing algorithm the data needs to be repacked
- `grib_set` **fails** when an error occurs
  - e.g. when a key is not found



# grib\_set – usage

```
grib_set [options] grib_file grib_file ... out_grib_file
```

## Options

<code>-s key1=val1,key2=val2,...</code>	List of key / values to set
<code>-p key1,key2,...</code>	Keys to print (only with <code>-v</code> )
<code>-w key1=val1,key2!=val2...</code>	Where option
<code>-d value</code>	Set all data values to <b>value</b>
<code>-f</code>	Do <i>not</i> fail on error
<code>-v</code>	Verbose
<code>-S</code>	Strict
<code>-r</code>	Repack data
<code>...</code>	

## grib\_set – examples

- To set the parameter value of a field to 10m wind speed (10si)

```
> grib_set -s shortName=10si in.grib1 out.grib1
```

- This changes e.g.
  - `shortName` to 10si
  - `paramId` to 207
  - `name` / `parameterName` to '10 metre wind speed'
  - `units` / `parameterUnits` to 'm s \*\* -1'
  
  - `indicatorOfParameter` to 207
  - `marsParam` to 207.128

## grib\_set – examples

- Some keys are read-only and cannot be changed directly

```
> grib_set -s name="10 metre wind speed" in.grib1 out.grib1
```

```
GRIB_API ERROR      : grib_set_values[0] name (3) failed: Value is read only
```

- The read-only keys can only be set by setting one of the other keys, e.g.
  - `shortName=10si`
  - `paramId=207`
  - `indicatorOfParameter=207`      **GRIB edition dependent !**

## `grib_set` – modify data values

- An offset can be added to all data values in a GRIB message by setting the key `offsetValuesBy`

```
> grib_get -F "%.5f" -p max,min,average TK.grib
315.44727 216.96680 286.34257

> grib_set -s offsetValuesBy=-273.15 TK.grib TC.grib

> grib_get -F "%.5f" -p max,min,average TC.grib
42.29726 -56.18321 13.19257
```

## grib\_set – modify data values

- The data values in a GRIB message can be multiplied by a factor by setting the key `scaleValuesBy`

```
> grib_get -F "%.2f" -p max,min,average Z.grib  
65035.92 -3626.08 2286.30
```

```
> grib_set -s scaleValuesBy=0.102 Z.grib1 orog.grib1
```

```
> grib_get -F "%.2f" -p max,min,average orog.grib1  
6633.64 -369.86 233.20
```

## grib\_set – using key values in output file

- Key values can be used to specify the output file

```
> grib_set -s time=0000 in.grib "out_[shortName].grib"
```

```
> ls out_*  
out_2t.grib  out_msl.grib ...
```

- Remember: Use quotes to protect the [ ]s !

## What **cannot** be done with `grib_set`

- `grib_set` cannot be used for making transformations to the data representation
  - It cannot be used to transform data from spectral to grid-point representation (and vice-versa)
- `grib_set` cannot be used transform data from one grid representation to another
  - It cannot be used to transform data from regular or reduced Gaussian grids to regular latitude-longitude grids
- `grib_set` cannot be used to select sub-areas of data
  - It will change the value of, e.g. `latitudeOfFirstGridPointInDegrees` etc, but the data will still be defined on the original grid
- **The GRIB tools cannot be used to interpolate the data**

## `grib_to_netcdf` – convert to NetCDF

- Use `grib_to_netcdf` to convert GRIB messages to NetCDF
- Input GRIB fields must be on a regular grid
  - `typeOfGrid=regular_ll` or `regular_gg`
- Options allow user to specify
  - the NetCDF data type:
    - `NC_BYTE`, `NC_SHORT`, `NC_INT`, `NC_FLOAT` or `NC_DOUBLE`
    - `NC_SHORT` is the default
  - either classic (NetCDF 3) or NetCDF 4 file format
  - the reference date
    - default is 19000101
- Used in the MARS web interface and the public Data Servers to provide data in NetCDF files



# `grib_to_netcdf` – usage

```
grib_to_netcdf [options] grib_file grib_file ...
```

## Options

- `-o output_file` Output netCDF file
- `-R YYYYMMDD` Use `YYYYMMDD` as reference date
- `-D NC_DATATYPE` NetCDF data type
- `-k kind` Kind of file to be created:
  - 1 → netCDF classic file format
  - 2 → netCDF 64 bit classic file format (Default)
  - 3 → netCDF-4 file format
  - 4 → netCDF-4 classic model file format
- `-T` Do not use time of validity.
- `-u dimension` Set `dimension` to be an unlimited dimension
- `-f` Do *not* fail on error

...

## grib\_to\_netcdf – examples

- To convert the fields in file.grib1 to NetCDF

```
> grib_to_netcdf -o out.nc file.grib1
grib_to_netcdf: Version 1.14.5
grib_to_netcdf: Processing input file `file.grib1'.
grib_to_netcdf: Found 1 GRIB field in 1 file.
grib_to_netcdf: Ignoring key(s): method, type, stream, refdate, hdate
grib_to_netcdf: Creating netcdf file 'out.nc'
grib_to_netcdf: NetCDF library version: 4.3.2 of Oct 14 2014 14:34:41 $
grib_to_netcdf: Creating large (64 bit) file format.
grib_to_netcdf: Defining variable 't2m'.
grib_to_netcdf: Done.

> ls -s out.nc
160 out.nc
```

## grib\_to\_netcdf – examples

- To convert the fields in file.grib1 to NetCDF with data type set to **NC\_FLOAT**

```
> grib_to_netcdf -D NC_FLOAT -o out.nc file.grib1
grib_to_netcdf: Version 1.14.5
grib_to_netcdf: Processing input file 'surface.grib1'.
grib_to_netcdf: Found 1 GRIB field in 1 file.
grib_to_netcdf: Ignoring key(s): method, type, stream, refdate, hdate
grib_to_netcdf: Creating netcdf file 'out.nc'
grib_to_netcdf: NetCDF library version: 4.3.2 of Oct 14 2014 14:34:41 $
grib_to_netcdf: Creating large (64 bit) file format.
grib_to_netcdf: Defining variable 't2m'.
grib_to_netcdf: Done.
```

```
> ls -s out.nc
316 out.nc
```

*Output NetCDF file is about twice the size*



## Practical 4: modifying GRIB messages

1. The file `tz_an_pl.grib1` contains parameters T and Z on five pressure levels.
  - Use `grib_copy` to create two files, one containing all the pressure levels for parameter T, the other for Z. Check the content of the new files with `grib_ls`
2. Use `grib_ls` to inspect the contents of `tp.grib`
  - What is the parameter set to ?
  - Use `grib_set` to change the parameter for the message in the file `tp.grib` to total precipitation ('tp' – parameter 228). Check the new message with `grib_ls`.
3. Use `grib_to_netcdf` to convert the GRIB messages in `file1.grib` to NetCDF.
  - Try with both the default data type (`NC_SHORT`) and `NC_FLOAT`.
  - Check the data values in each case with `ncdump`.
4. Use `grib_to_netcdf` to convert the GRIB messages in `file2.grib` to NetCDF.
  - What happens ... and why ?

# GRIB API user interfaces

- For some processing it is more convenient – or even necessary – to write a program
- The GRIB API library supports three user interfaces:

- C: `#include <grib_api.h>`

- Fortran 90 interface: `use grib_api`

- Python interface: `import gribapi`

- At ECMWF two environment variables `GRIB_API_INCLUDE` and `GRIB_API_LIB` are defined to aid compilation and linking of Fortran 90 and C programs

- On ecgate:

```
gcc myprog.c $GRIB_API_INCLUDE $GRIB_API_LIB -lm
```

```
gfortran myprog.f90 $GRIB_API_INCLUDE $GRIB_API_LIB
```

# General framework

- A (Fortran) code will generally include the following steps:
  - Open one or more GRIB files (for read or write)
    - Standard Fortran calls **cannot** be used to open or close a GRIB file. You **have to** call **`grib_open_file` / `grib_close_file`**
  - Calls to load one or more GRIB messages into memory
    - These subroutines will return a unique **`grib identifier`** which can be used to manipulate the loaded GRIB messages
  - Calls to encode / decode the loaded GRIB messages
    - Only **loaded** GRIB messages can be encoded / decoded
    - You should encode / decode only what you need (not the full message)
  - Calls to write one or more GRIB messages into a file (encoding only)
  - Release the loaded GRIB messages
  - Close the opened GRIB files

# Specifics of the GRIB API F90 interface

- Only subroutine names starting with `grib_`
  - `grib_get`, `grib_set`, `grib_new_from_file`, etc ...
- **All** routines have an optional argument for error handling:

```
subroutine grib_new_from_file(ifile, igrib, status)
  integer, intent (in)           :: ifile
  integer, intent (out)          :: igrib
  integer, optional, intent (out) :: status
```

- If **status is not present and an error occurs**, the **program stops** and returns the error code to the shell
- **Use *status* to handle errors yourself** (e.g. necessary for MPI parallel codes)

call `grib_new_from_file(ifile, igrib, status)`

Input arguments  
Output arguments

# Loading / Releasing a GRIB message (1/2)

- GRIB API can decode only loaded GRIB messages
- Two main subroutines to load a GRIB message for decoding
  - `grib_new_from_file` (`ifile`, `igrib`)  
Loads a GRIB message from a file already opened with `grib_open_file`  
Use `grib_close_file` to close this file
  - `grib_new_from_index` (`indexid`, `igrib`)  
Loads a GRIB message from an index  
This index will first have been built

Input arguments

Output arguments



## Loading / Releasing a GRIB message (2/2)

- These subroutines return a **unique grib identifier** (*igrib*)
  - Loaded messages are manipulated through this identifier
- **You do not have access to the buffer containing the loaded GRIB message**
  - This buffer is **internal** to the GRIB API library
- The buffer occupied by **any** GRIB message is kept in memory
- Therefore, the routine **grib\_release**(*igrib*) **should always** be used to free the buffer containing a loaded buffer message.

Input arguments

Output arguments

# Example – Load from file

```
1 PROGRAM load_message
2 USE grib_api
3 IMPLICIT NONE
4
5 INTEGER :: rfile, igrib
6 CHARACTER(LEN=256), PARAMETER :: input_file='input.grb'
7 CHARACTER(LEN=10), PARAMETER :: open_mode='r'
8
9 !
10 ! Open GRIB data file for reading.
11 !
12 CALL grib_open_file(rfile, input_file, open_mode)
13
14 CALL grib_new_from_file(rfile, igrib)
15
16
17 CALL grib_release (igrib)
18 CALL grib_close_file (rfile)
19 END PROGRAM load_message
```

Input arguments

Output arguments

*'r' to read, 'w' to write  
(C naming convention)*

*Unique link to the buffer  
loaded in memory. Calls to  
grib\_get subroutine are  
needed to access and  
decode this message*

GRIB  
Message

# Decoding a loaded GRIB message

- The idea is to decode as little as possible !
- You will **never** decode all the loaded GRIB message
  - use `grib_dump` for this !
- One subroutine for decoding:

```
grib_get (igrib, keyname, values, status)
  integer, intent (in)           :: igrib
  character(len=*), intent (in)  :: keyname
  <type>,[dimension(:),] intent (out) :: values
  integer, optional, intent (out) :: status
```

Input arguments  
Output arguments

Where <type> is integer or single / double precision real or character

# Fortran example – grib\_get

! Load all the GRIB messages contained in file.grib1

call `grib_open_file`(ifile, 'file.grib1', 'r')

call `grib_new_from_file`(ifile, igrib, iret)

LOOP: do while (iret /= GRIB\_END\_OF\_FILE)

! Decode/encode data from the loaded message

call `grib_get`(igrib, "dataDate", date)

call `grib_get`(igrib, "typeOfLevel", levtype)

call `grib_get`(igrib, "level", level)

call `grib_get_size`(igrib, "values", nb\_values)

allocate(values(nb\_values))

call `grib_get`(igrib, "values", values)

print\*, date, levtype, level, values(1), values(nb\_values)

! Release

deallocate(values)

call `grib_release`(igrib)

! Next message

call `grib_new_from_file`(ifile, igrib, iret)

end do LOOP

call `grib_close_file`(ifile)

*Loop on all the messages in a file. A new grib message is loaded from file. igrib is the grib id to be used in subsequent calls*

*Values is declared as real, dimension(:), allocatable:: values*

*Release the memory!*

# Python example – grib\_get

```
#!/usr/bin/env python
import sys
from gribapi import *
```

```
# Load all the GRIB messages contained in file.grib1
```


```
ifile = open('file.grib1')
```

```
while 1:
```

```
    igrib = grib_new_from_file(ifile)
```

```
    if igrib is None: break
```

*Loop on all the messages in a file. A new grib message is loaded from file. igrib is the grib id to be used in subsequent calls*



```
# Decode/encode data from the loaded message
```

```
date = grib_get( igrib , "dataDate")
```

```
levtype = grib_get(igrib, "typeOfLevel")
```

```
level = grib_get(igrib, "level")
```

```
values = grib_get_values(igrib)
```

```
print date, levtype, level, values[0], values[len(values)-1]
```

*Values returned as an array*



```
# Release
```

```
grib_release(igrib)
```

```
ifile.close()
```

*Release the memory!*



## Practical 5: GRIB decoding with Fortran 90

- Work on `ecgate`
- The practical5 directory contains the program `grib_api_demo.f90`, a `Makefile` and some data in `grib_file.grib`
- Build an executable and run with
  - > `make`
  - > `./grib_api_demo > output`
- Look at the GRIB contents in the output file. Use `grib_ls` and `grib_dump` to examine the file `grib_file.grib`
- Change the program, replacing the call to `grib_dump` with several calls to `grib_get` to decode the values for the edition, date, time, paramId (or shortName) and level
- Add your own 'WRITE' or 'PRINT' statements to output this information

## GRIB API can do more...

- The idea is to provide a set of high-level keys or subroutines to derive / compute extra information from a loaded GRIB message
- For example:
  - keys (READ-ONLY) to return average, min, max of values, distinct latitudes or longitudes, etc ...
  - Subroutines to compute the latitude, longitude and values
    - `grib_get_data`
  - Subroutines to extract values
    - `grib_find_nearest`: extract values closest to given geographical points
    - `grib_get_element`: extract values from a list of indexes
  - Subroutines for indexed access
    - Usually much faster than sequential access for “random” access

*For lat/lon, Gaussian, reduced Gaussian grids. It is similar to the `grib_get_data` GRIB tool*

*Like "`grib_ls -l`"  
"or "`grib_get -l`"*

# GRIB decoding – summary

- Use GRIB Tools where possible
  - It is not always necessary to write a program !
- Use edition-independent keys
  - Provides transparent access to GRIB 1 and GRIB 2 messages
- ECMWF introduced GRIB 2 encoding for all its model level fields in May 2011
- If you do need to write a program think carefully about how the fields are accessed
  - Indexed access can be much faster than sequential access
- If you want to learn more about GRIB API then we hold a specialist course each year  
ecCodes: GRIB and BUFR data decoding and encoding software



# Documentation

- The WMO FM 92 GRIB Manuals can be obtained from [www.wmo.int/pages/prog/www/WMOCodes.html](http://www.wmo.int/pages/prog/www/WMOCodes.html)
- The ECMWF GRIB API manual is available at <https://software.ecmwf.int/wiki/display/GRIB/Home/>
- The GRIB Tools are documented at <https://software.ecmwf.int/wiki/display/GRIB/GRIB+tools>
- GRIB API Fortran 90 interface: [https://software.ecmwf.int/wiki/display/GRIB/Fortran+package+grib\\_api](https://software.ecmwf.int/wiki/display/GRIB/Fortran+package+grib_api)
- GRIB API examples <https://software.ecmwf.int/wiki/display/GRIB/GRIB+API+examples>